


# Data Sheet

## Miniature Rotary Coded Switch SRM

- 10 or 16 positions switch in SMT (Surface Mounted Technology)
- Washable switches are protected by an adhesive foil
- Suitable for mechanical mounting and soldering
- Gold plated contacts and terminals
- RoHS compliant

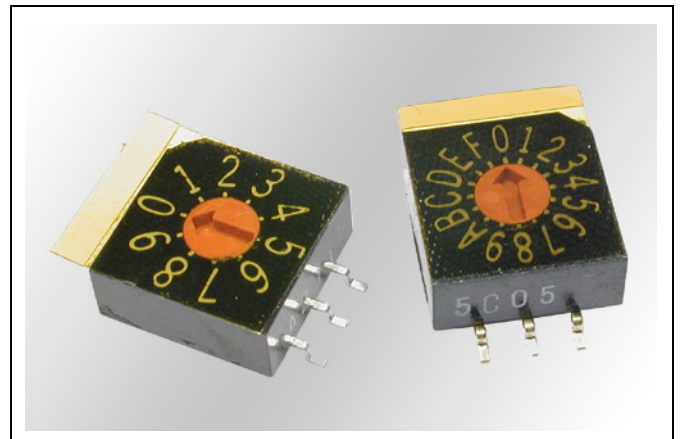


### Technical Data

Max. operating voltage	50 VDC
Max. current (carrying capacity)	100 mADC
Max. switching	0.8 W
Contact resistance	< 100 mΩ
Insulation resistance (at 10 VDC)	> 100 mΩ
Test voltage (1 minutes)	250 VAC
Capacity between 2 switches (at 1.000 KHz)	< 5 pF
Life expectancy	10.000 steps
Operating temperature	-10° ... +60°C
Storage temperature	-20° ... +85°C

Unless otherwise specified, components for wave soldering are limited to

- a pre-heat temperature of 100 °C max. for 60 s max. and
- a soldering temperature of 260 °C max. for 5 s max.


### Dimensions

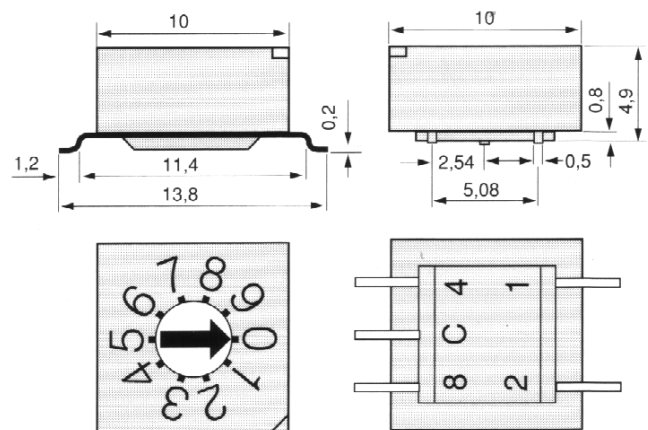

### Order Number Configuration

① Type		<b>SRM</b>
② No. of positions	10 positions	10
	16 positions	16

### Ordering Key



- ① Type
- ② No. of positions

Specifications are subject to change without notice.